

The Leader in Advanced imaging expands its legacy

**imageRUNNER®**  
**C5800/C6800**

Maximum Size :13\*19.  
Max.Thickness:300 GSM.  
Auto Color Sensivity.  
Speed:68 cpm - Black.  
Speed:16 cpm Color.  
Amorphous Silicon Technology.

There are lot of small way for  
business to add colour smartly  
to thier black and white documents.



**Color-enabled**


Sales representations  
Tender Documents  
Financial Reports  
Superior colour  
quality printouts



▶ Save Time ▶ Use Technology Smartly ▶ Increase Productivity

\*Accessories Shown are not part of Standard equipment

Additional Finisher Tray-A1

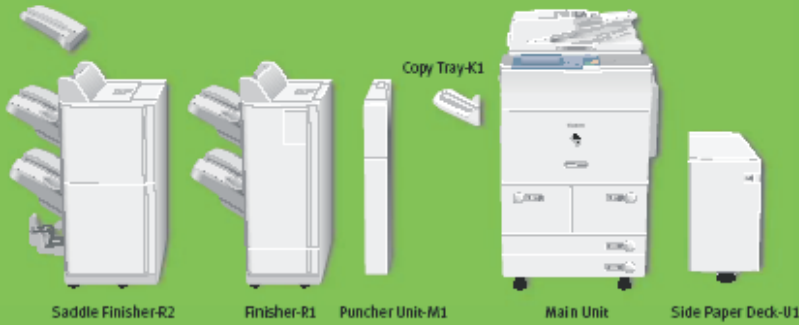

imageRUNNER®  
C5800 / C6800

## imageRUNNER C5800/C6800 Specifications

Type	: Color Digital, Multifunction Imaging System
Imaging System	: Laser Dry Electrostatic Transfer Developing System
(B/W, Color)	: Dry Mono Component/Dual Component
Toner Projection	
Image Server Memory	: Standard 768MB RAM + 40GB HDD
(Max. Capacity)	: Approximately 3,700 Originals)
First-copy Time	: 5.3 Seconds (B/W) 12.2 Seconds (Color)
Warm-up Time	: 9 Minutes or Less
Copy Speed	
(B/W, Color)	: 58/68, 16 ppm (Letter)
Acceptable Originals	: Sheets, Books, 3-dimensional Items (Up to 4.4 lb.)
Max. Original Size	: 11" x 17"
Max. Copy Size	: 13" x 19"
Min. Copy Size	: 4-1/8" x 5-7/8"
Max. Mail Boxes	
Supported	: 100
Max. Copy Reservation	: 5 Jobs
Copy/Scan Resolution	: 600 x 600 dpi
Engine Resolution	: 600 x 600 dpi
Print Resolution	: 2400 dpi x 600 dpi Interpolated
Automatic Exposure	: AE or Manual (Text, Photo, or Text and Photo)
Halftones	: 256 Gradations (Continuous-tone)
Duplexing	: Standard Automatic Trayless Duplexing
Magnification	: 25% to 400% (in 1% Increments) from Glass Paper Sources
Standard	: Dual Front-loading Trays (1,500 Sheets Each) Dual Front-loading Cassettes (550 Sheets Each)
100-sheet Stack Bypass	
Optional	: 3,500-sheet Paper Deck (Total: 7,700 Sheets)
Multiple Copies	: 1 to 9,999
Paper Thickness	: 300 GSM
Dimensions (H x W x D)	: 46-7/8" x 26-3/4" x 33-1/2" (1191mm x 679mm x 852mm)
Weight	: 498 lb. (226kg)
Power Requirements	: 120V, 60Hz, 16A
Power Consumption	: 1.75kW
Plug	: NEMA 5-20R
Drum	: Amorphous Silicon
Estimated Yield	: 3,000,000 Impressions
Maximum Duty Cycle	: 230,000/280,000 Impressions per Month
Toner	
Black: Estimated Yield	: 40,000 Images (at 6% Coverage)
Colors: Estimated Yield	: 9,500 Images (at 5% Coverage)

### Accessories

#### Color Universal Send™ Kit-C1P\*

Sending Methods	: E-mail, I-fax, Super G3 Fax (Optional), File Server, User Inbox (IPX, FTP, SMB)
Address Book Capacity	: Max. 1,800 plus LDAP
File Format	: TIFF/PDF, PDF/PDF, PDF Compact)TIFF/JPEG
Sending Sizes	: Statement to 11" x 17"

#### Automatic Document Feeder (Optioned)

Acceptable Originals	: Statement to 11" x 17"
Capacity	: 100 Sheets (Letter/20 lb.)
Max. Paper Weights	: 10 lb. to 32 lb. Bond (Simplex)13 lb. to 32 lb. Bond (Duplex)

#### Canon Color Network Multi-PDL Printer Kit-C1 (Optional)

Processor	: Canon Custom Processor— Shared
RAM	: 768MB (Std./Max.)—Shared
Hard Disk	: 40GB—Shared
PDL Support	: PCL 5c, PostScript® 3™ Emulation, UFR

#### Interface Connections

Standard	: RJ-45 (10/100Base-T)
Optional	: Token Ring, USB Full-speed (1.1 Equivalent)
Network OS	: Windows® 98/Me/2000/XP Windows NT® 4.0 Solaris™ 1.x, 2.5, or later Apple® System 7.5, or higher Novell® NetWare® v.3.2, 4.1, 4.11, 4.2, 5, 5.1, 6

#### imagePASS-D1 (Optional)

Type	: Intel® Pentium® III External Piggy-back Controller
Processor	: 850MHz Processor
RAM	: 128MB (Std.), 256MB (Max.)
Hard Disk	: 20GB
PDL Support	: Adobe® PostScript 3, PCL 5c

#### Interface Connections

Standard	: RJ-45 (10/100Base-T) Parallel Port (Type B Connector)
Network OS	: Novell NetWare v.4.1, 4.2, 5, 5.1, 6.0 (IPX/SPX) Windows 98/Me/2000/XP Windows NT (TCP/IP), Solaris 2.5.1 or later, Apple System 7.5 or higher (DDP)

#### Optional

▶ ADF ▶ FAX

\*Specifications Subject to Change Without Notice.