

imageRUNNER® 3570 / 4570



Your business is Unique, Why not your office equipment?



- Vertical Path Printing
- Contact image sensor (CIS Technology)
- Rapid fusing system
- Worldclass grayscale photocopier
- Universal send kit

The latest IR Multi functional printer achieve more without exceeding your budget

Black & White intelligence that support in your business

Relax & enjoy an easier way to present your documents


Representing a symbol of innovative technology, Quality and reliability

meap
POWERED BY

* Accessories shown are not the part of standard equipment

Specifications

Type	: Digital, Multifunction Imaging System
Imaging System	: Laser Dry Electrostatic Transfer
Developing System	: Dry Mono Component Developing System
Fixing System	: RAPID Fusing System
Image Server Memory	: Standard 512MB RAM/20GB HDD
First copy Time	: 3.9 Seconds from Platen Glass 6.9 Seconds from feeder
Warm-up Time	: 10 Seconds or Less from Sleep Mode 30 Seconds from Main Power Off Copy/Print Speed: Up to 35/45 ppm (Letter)
Maximum Size	: A3
Max. Mail Boxes Supported	: 100
Max. Copy Reservation	: 5 Jobs
Actual Resolution	: 600 dpi x 600 dpi
Interpolated Resolution	: 2400 dpi x 600 dpi (Print)
Halftone	: 256 Gradations of Gray
Duplexing	: Standard Automatic Trayless Duplexing
Magnification Reduction/Enlargement	: 25% to 400% — Platen 25% to 200% — Feeder (in 1% increments)
Exposure Control	: Automatic or Manual (9 Levels)
Paper Sources Standard	: Dual 550-sheet Paper Cassettes (1,100 Sheets) Stack Bypass (50 Sheets)
Optional	: 2,500-sheet Paper Deck (20 lb. Bond) Dual 550-sheet Cassette Feeding Unit (4,750 Sheets Max.)
Multiple Copies	: 1 to 999
Paper Weights	: 17 lb. to 20 lb. Bond (Cassette) 17 lb. to 32 lb. Bond (Stack: Bypass)
Network Interface Connections	: 10/100Base-T (RJ-45)
Dimensions (H x W x D)	: 29-7/8" x 22-1/4" x 27-5/8" (761mm x 565mm x 700mm)
Installation Space (W x D)	: 34" x 27-6/8"
Weight	: 136 lb. (61.6kg)
Power Requirements	: 120V AC, 60Hz, 10A
Power Consumption	: 1.35KW (Max.)
Toner Yield	: 24,000 @ 6% Coverage
Optional Accessories Universal Send Kit-B1	
Sending Methods	: E-mail, I-fax, Super G3 Fax (Optional User Inbox, File Server (IPX, FTP, SMB))
Address Book Capacity	: Max. 1,800 Destinations Max. 5 LDAP Servers
File Format	: TIFF, PDF, Optional PDF (OCR)
Sending Sizes	: Statement to 11" x 17"
Duplexing Automatic Document Feeder-N1	
Acceptable Originals	: Statement to 11" x 17"
Capacity	: 50 Sheets (20 lb. Bond/Letter)
Max. Paper Weight	: 13 lb. to 32 lb. Bond
Cassette Feeding Unit-Y2 paper Capacity	: Dual 550-sheet Paper Cassettes (1,100 Sheets/20 lb. Bond)
Acceptable Paper Sizes	: Statement-R to 11" x 17"
Acceptable Paper Weights	: 17 lb. to 20 lb. Bond
Paper Deck-Q1	
Paper Deck Capacity	: 2,500 Sheets (20 lb. Bond)
Paper Size	: Letter
Acceptable Paper Weights	: 17 lb. to 20 lb. Bond

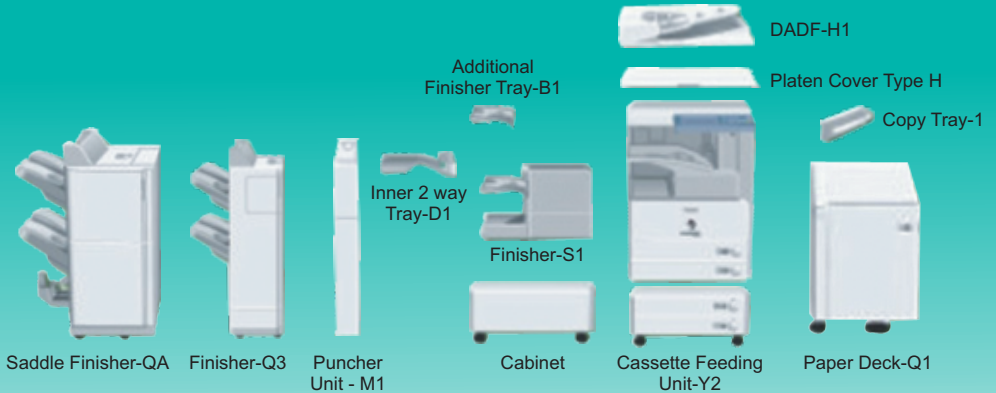

Inner 2-Way Tray-D1

Number of Trays	: Two
Tray Capacity	
Lower Output Tray	: 250 Sheets (Letter) 100 Sheets (Other Sizes)
Upper Output Tray	: 100 Sheets (Letter) 50 Sheets (Other Sizes)
Copy Tray-J1 (optional)	: 150 Sheets (Letter)
Acceptable Paper Sizes	: Statement to 11" x 17"
Attachable Accessories	: Copy Tray-J1
Finisher-S1	
Number of Trays	: One (Second Tray Optional)
Tray Capacity	
Non-collate, Collate, Group Mode	: 1,000 Sheets (Letter, Statement)
Staple Mode	: 1,000 Sheets./30 Sets
Tray Capacity (with Additional Finisher Tray-B1)	
Non-collate, Collate, Group Mode	: 300 Sheets per Tray (Letter, Statement)
Staple Mode	: 300 Sheets/30 Sets per Tray (Letter) 150 Sheets/30 Sets (Legal, 11" x 17")
Staple position/Size	: Corner Stapling (11" x 17", Legal, Letter, Letter-R)

Max. Stapling Capacity (Up to 20 lb. Bond)	: 50 Sheets (Letter)
Attachable Accessories	: Puncher Unit-R1

Additional Finisher tray-B1

Copy Tray-J1	
Finisher-Q3/Saddle Finisher-Q4	
Number of Trays	: Two
Tray Capacity	
Non-collate, Collate, and Group Mode	: 1,000 Sheets (Letter, Statement) 500 Sheets (11" x 17", Legal, Letter-R)
Staple Mode	: 1,000 Sheets/30 Sets (Letter) 500 Sheets/30 Sets (11" x 17", Legal, Letter-R)

max. Stapling Capacity	
Comer, Double	: 50 Sheets (Letter), 30 Sheets (Letter-R, Legal, 11" x 17")

Saddle-stitching (Available on Saddle Finisher-Q4 Only)	
Acceptable Paper Sizes	: Letter-R, Legal, 11" x 17"
Capacity/Tray	: 1 to 5 Sheets/25 Sets 6 to 10 Sheets/15 Sets 11 to 15 Sheets/10 Sets

Max. Stapling Capacity/Set: 15 Sheets

Folding	: V-fold
Attachable Accessories	: Puncher Unit-M1 Super G3 Fax Board-Q1/G3 Multi-Line Fax Board-D1
Applicable Line	: Public Switched Telephone
Network (PSTN)	
Connection Lines	
Super G3 Fax Board-Q1	: One
Super G3 Multi-Line Fax Board-D1	: Two
Sending/Original Sizes	: Statement to 11" x 17" (from Document Feeder) Statement to 11" x 17"

Multi-PDL printer Kit-E1

Processor	: Canon Custom Processor-Shared
RAM	: 512MB - Shared
Hard Disk	: 20 GB - Shared
PDL Support	: PCL 5e, PCL 6, PostScript 3 Emulation, UFR II Interface Connections
Standard	: RJ-45 (10/100Base-T), USB 2.0

High-speed	
Network OS	: Windows® 98/Me/2000/XP Windows NT®4.0/Server 2003 Macintosh® OS 8.0 or Later (PPD) Solaris 1.1x, 2.5x or Later Novell® NetWare® v3.2, 4.1, 4.11, 4.2, 5, 5.1, 6, 6.5 (IPX/SPX)

Additional Optional Accessories and Utilities

Platen Cover Type H	Universal Send PDF Enhancement Kit-B1
Puncher Unit-R1-M1	imageRUNNER Security Kit-A2
Cabinet	eCopy Suite/ShareScan OP
Envelope Feeder Attachment-C1	Copy Tray-J1
Accessibility Handle-A1	Bar Code Printing Kit-A1*
Braille Label Kit-A1	Web Access Software-A1*
Document Tray-J1	Voice Guidance Kit-A2*
Card Reader-C1	Remote Operator's Software Kit-A1*
Card Sets Removable HDD Kit*	

* Specifications subject to change without notice